
PH Europe Limited
Ellerslie House, Queens Road, Edgerton,
Huddersfield HD2 2AG
Tel: +44 (0) 1484 351070 • **Fax:** +44 (0) 1484 351080
e-mail: info@pheurope.com
www.pheurope.com

Ref code	Capacity	Frame Base Size	Frame Height
PHBTA-1000	1000Lts	1215mm x 1015mm	1550mm

PHBTA IBC CONTAINER

- Long life stainless-steel IBC
- UN certified for packaging groups II & III
- Discharge to the long side
- Manhole DN400 with P-ring
- Screw cover with 6 eye bolts and wing nuts
- 2 off top-mounted connections

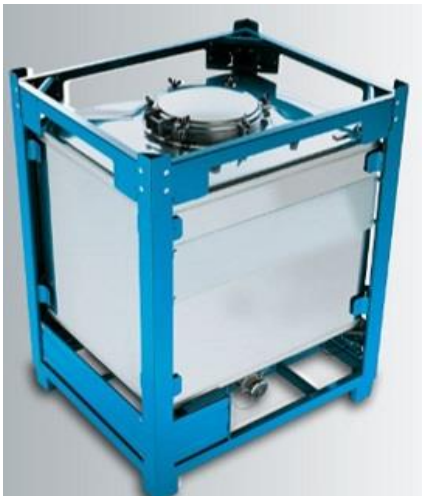

Tank Shell	2.0 mm stainless-steel 1.4301 (similar AISI 304) finish III c (2B DIN EN 10088) Pickled and neutralised
Capacity	1000 litres
Frame Material	Mild steel (S235JR) – hot galvanized acc. To DIN EN ISO 1461
Manlid	Screw cover with 6 eye bolts and brass wing nuts – gasket EPDM
Sockets	1 off G1" (female thread) mounted on the tank top with stainless-steel overpressure valve 1 off G1" (male thread) mounted on the tank top with stainless-steel closure cap
Relief Valve	1 off 1" with the valve set at -0.02 & +0.48 bar and Perlast gasket.
Outlet	Spherical discharge with flange, stainless-steel ball valve 2", gasket PTFE, with locking, double nipple G2" (male thread) and stainless-steel closure cap with PTFE gasket
Tamper evidence	
Equipment	Valve protection / grounding / UN certification plate and manufacturers plate with unique serial number
Handling	4-way fork truck entry and top lift facility
Stacking	Designed for multiple stacking to maximum rated loads
Approval	GGVSEB / GGVSee / ADR / RID / IMDG-Code
Max Density	2.10 kg/litre